COUNTDOWN TIMER SWITCH INSTRUCTIONS





GTSW-CD-V (VERTICAL) OR GTGW-CD-H (HORIZONTAL)

Display symbols

SYMBOL	EVENT
OFF	Timer is off
— — —	Countdown standing by


SYMBOL	EVENT
ON	Timer is on
1	Timer is set to 1 hour

▲	Up
▼	Down
OK	Confirm
POWER	Power

The Radiant Count Down timer is designed to be turned on manually and then stays on for a pre-set amount of time.

Set up your timer

1. To operate simply press the power button so the unit is ON.
2. Then using the UP arrow select the length of time you wish the unit to stay on for – your options are:
   - 0.5 hrs
   - 1 hr
   - 2 hr
   - 3 hr
   - 4 hr
   - 5 hr
3. When you reach the desired time pre-set press OK.
4. The timer will then engage and automatically turn off after the chosen time period has elapsed.

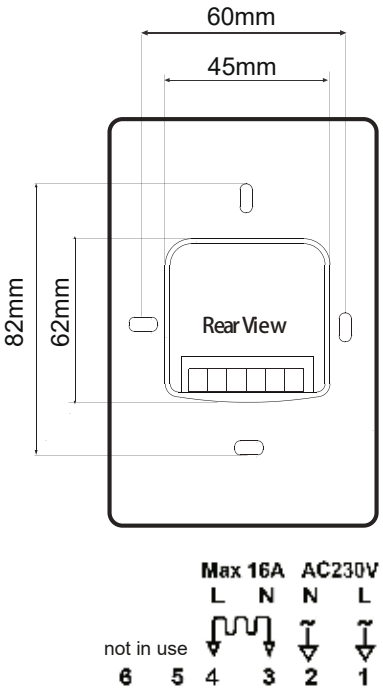

PTO



radiant AUSTRALIA

Installation and Wiring

1. Carefully separate the front half of the timer switch from the back plate by placing a small flat head screw driver into the slots in the bottom face of the timer switch.
2. Carefully unplug the ribbon connector which is plugged into the front half of the timer switch.
3. Place the time switch front half somewhere safe. Terminate the timer switch as shown in the diagrams on the right.
4. Screw the timer switch back plate on to the flush box.
5. Re-connect the timer switch ribbon cable and clip the two halves together.

This product should be installed by a qualified electritian.